TYPICAL HIGHWAY CROSS SECTIONS

2 LANES

2 D

SIDEWALK PLACEMENT BEHIND A ROADWAY DITCH

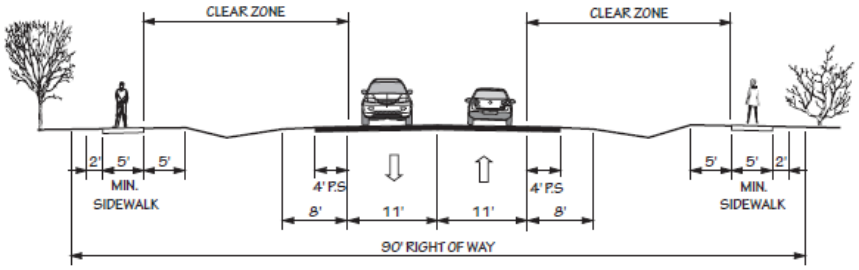

2 E

CURB AND GUTTER
WITH BIKE LANES AND SIDEWALKS

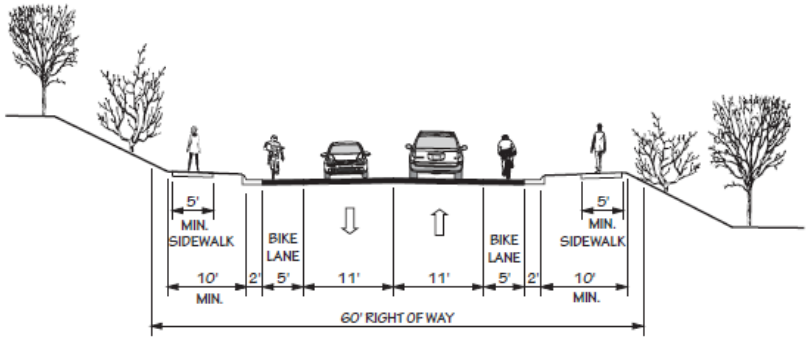

2 F
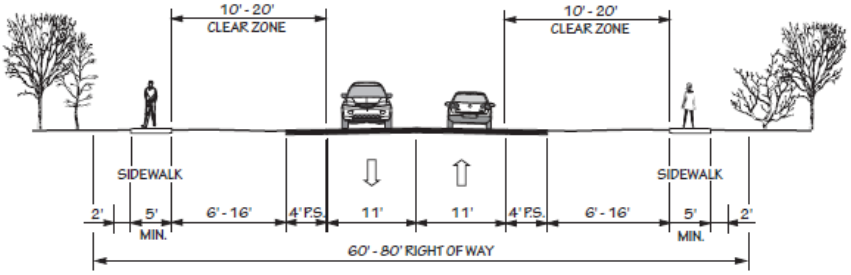
BUFFERS AND SIDEWALKS WITHOUT A ROADWAY DITCH
(20 MPH TO 45 MPH)
(TYPICALLY COASTAL AREA MANAGEMENT ACT COUNTIES)